



IEC PERFORMANCE DATA SHEET

IEC Efficiency Level IE3

Catalog #:

IJA132M2-2-59

HP	kW	Voltage	L.R. Amps	EFF.	P.F.	SF	Frame	Design
15.00	11.19	575 / 990	107.44	91.0%	0.89	1.15	132M	N

60 Hz								
FLA							Is/In	F.L. RPM
208	230	333	460	575	796	990		
/	/	/	/	13.60	/	7.92	7.9	3530

50 Hz								
FLA						Efficiency	Is/In	F.L. RPM
190	380	400	415	660	725			
/	/	/	/	/	/	/	/	/

Wgt. Lbs	PH	Duty	Insul. Class	Ambient Temp.	Elevation	Temp. Rise° C
129.8	3	S1	H	40°C	1000 M	50

% Efficiency		% Power Factor		Torque			Protector Type	Winding Resist. Ω
					60Hz	50Hz		
Full Load:	91.0%	Full Load:	0.89	FLT ft.lbs	22.32	/	PTC-150°C	-
3/4 Load:	90.5%	3/4 Load:	0.82	LRT %	220	/		
1/2 Load:	89.4%	1/2 Load:	0.70	BDT %	230	/		

Rotor Inertia Wk2 Lb-Ft2	Max Load Inertia Wk2 Lb-Ft2	Shaft Material	Frame Material	DE Bracket Type	ODE Bracket Type	Mounting	Enclosure	Protection
-	-	Standard	Aluminum	Standard	Standard	B3	TEFC	IP55

Ball Bearings		Grease	Mount Type	Orientation	Cold Start (Secs)	Paint
DE	ODE					
6308ZZ-C3	6208ZZ-C3	Mobil PolyRexEM	Rigid	Horizontal	15	RAL3003 Mat


Inverter Duty. Motor meets MG1 parts 31.4.4.2	Constant Torque Range	Variable Torque Range
	10:1	20:1

WIRING CONNECTION DIAGRAM :


D

IEC Frames 112M - 355L, Dual Voltage
575 / 990 VAC, 6 posts, 6 leads, Δ / Y Connection

Low Voltage (575Vac)
6 Leads Δ 6 posts



High Voltage (990Vac)
6 Leads Y 6 posts




Date: **2 février, 2021**
 Customer: _____
 Contact: _____
 Submittee: **J.C. Lavallée**


Catalogue #: **IJA132M2-2-59**

IEC Efficiency Level IE3											
HP	Kw	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Is/In	Insulation Class	Temp. Rise °C
15.00	11.19	575 / 990	3530	TEFC	132M	60	N	2	7.9	H	50
Load %	0%	25%	50%	75%	100%	125%	150%				
Amps	10.98	10.98	12.03	12.55	13.60	15.69	19.88				
Torq ft/lbs	0	5.50	11.05	16.66	22.32	29.09	37.36				
RPM	0	3583	3565	3548	3530	3385	3163				
Eff %	0	66.8	89.4	90.5	91.0	88.6	81.4				
PF %	0	40.7	70.3	82.3	89.0	91.7	93.5				
	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBa @ 1M	
Speed (RPM)	0	1620	2700	3530	3600	S1	1.15	40°C	3,300 ft	-	
Current (Amps)	107.44	85.95	60.17	13.60	10.98	VFD Rating: Meets MG1 parts 31.4.4.2					
Torque (ft-lbs)	49.10	41.73	51.33	22.32	0.0	C.T.	10:1	V.T.	20:1		

Motor Speed Data

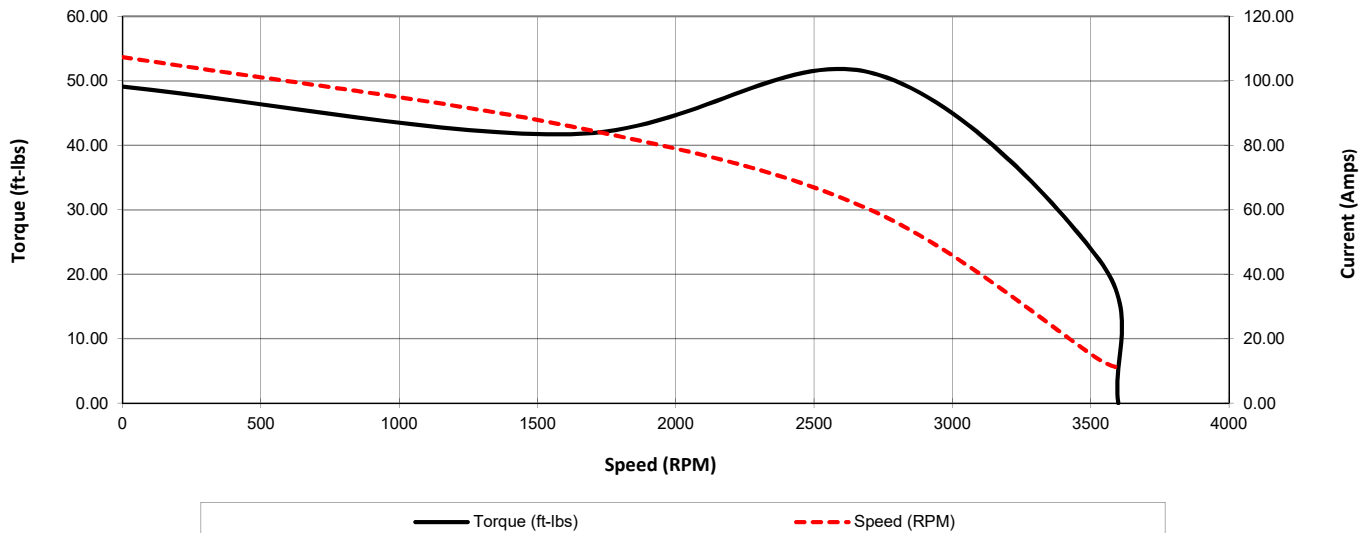

Motor Load Data

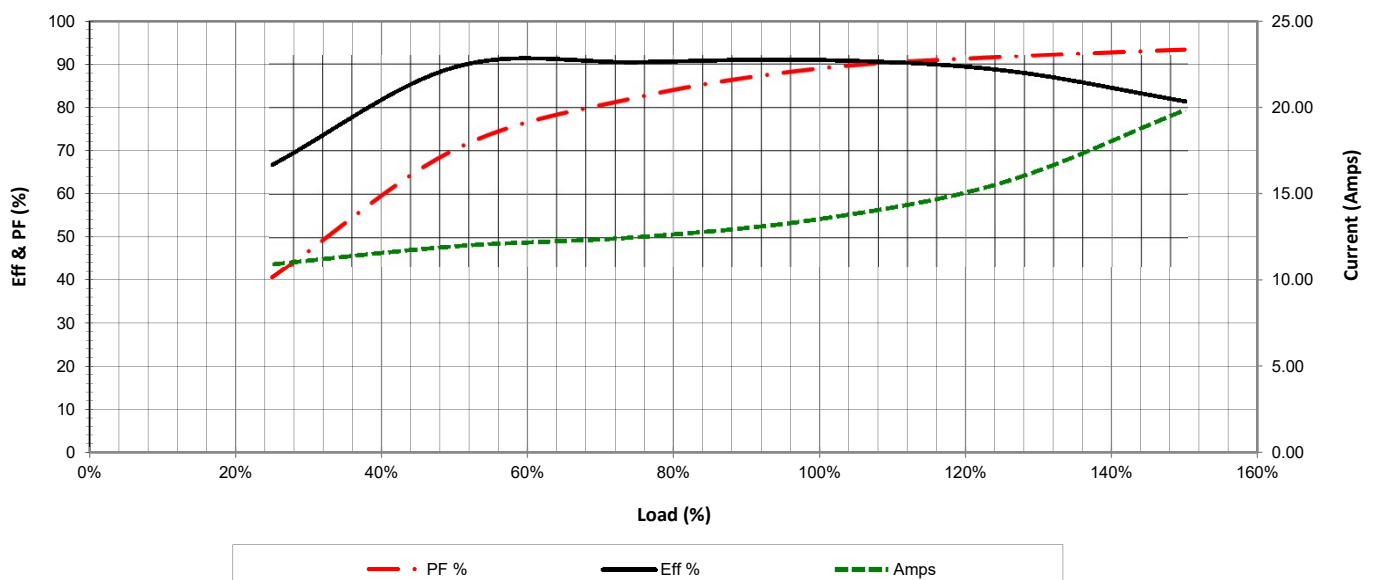




Date: 2 février, 2021
 Customer: _____
 Contact: _____
 Submittee: J.C. Lavallée

Catalogue #: IJA132M2-2-59

IEC Efficiency Level IE3											
HP	Kw	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Is/In	Insulation Class	Temp. Rise °C
15.00	11.19	575 / 990	3530	TEFC	132M	60	N	2	7.9	H	50
	0Hz	6Hz	15Hz	30Hz	45Hz	60Hz	75Hz	90Hz	105Hz	120Hz	
Amps	13.60	13.60	13.60	13.60	13.60	13.60	13.60	13.60	13.60	13.60	13.60
RPM	0	353	883	1765	2648	3530	4413	5295	6178	7060	
Torq ft.lb	17.85	22.32	22.32	22.32	22.32	22.32	17.85	14.88	12.75	11.16	
Peak Tq ft.lb	23.99	47.98	47.98	47.98	47.98	47.98	38.39	31.99	27.42	13.60	
HP	0.00	1.50	3.75	7.50	11.25	15.00	15.00	15.00	15.00	15.00	
	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M	
Speed (RPM)	0	1620	2700	3530	3600	S1	1.15	40°C	3,300 ft	-	
Current (Amps)	107.44	85.95	60.17	13.60	10.98	VFD Rating: Meets MG1 parts 31.4.4.2					
Torque (N.m)	49.10	41.73	51.33	22.32	0.0	C.T.	10:1	V.T.	20:1		

Motor Speed Data

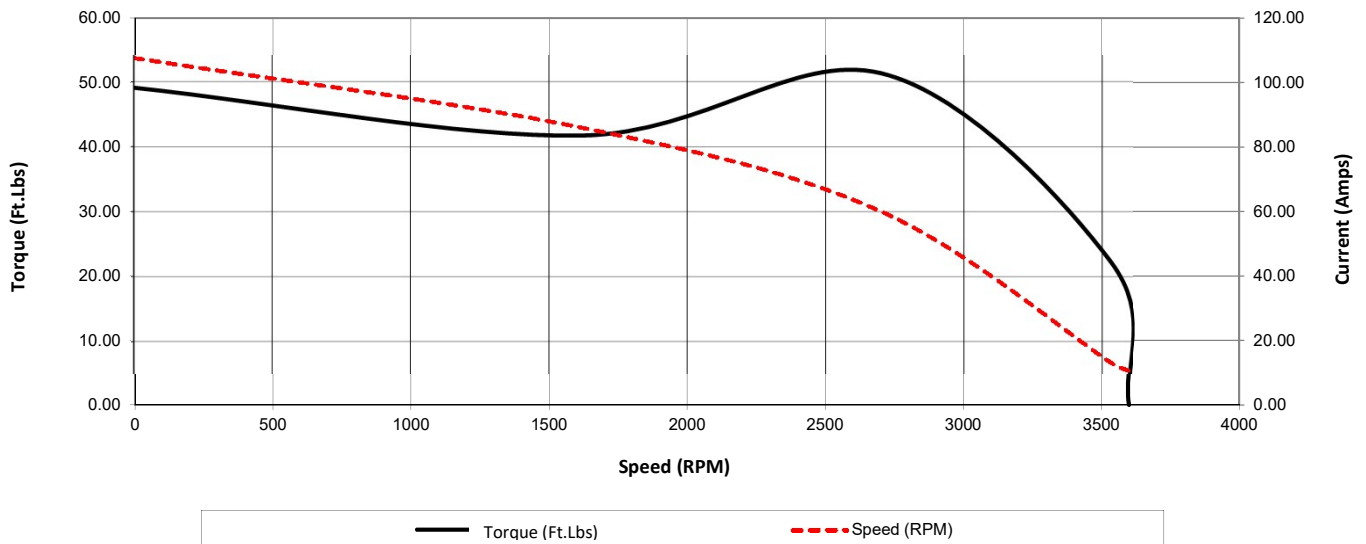

Motor Torque Capability vs RPM

