


Technical Documentation

**APH30065L-841**  
**Advantage Plus IEEE 841 | AEHH8B**

Date: June 29, 2020



	
	Date: June 29, 2020

### Technical Data Sheet

Motor Type: AEHH8B	Catalogue No: APH30065L-841
--------------------	-----------------------------

#### Nameplate Information

HP	Pole	RPM	Frame	Voltage	Hz	Phase
300	6	1185	5009B	575	60	3
Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.15	Continuous	B	-40 to 40 °C	<1000 m

#### Typical Performance

Efficiency (%)				Power Factor (%)		
Full Load		3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
Nom.	Min.					
95.8	95.0	95.4	93.6	86.5	84.7	80.0
Torque				Current (A)		
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	No Load	Full Load	Locked Rotor
1328.00	100	100	220	61.2	271.2	1760
NEMA KVA Code	Inertia (WR <sup>2</sup> )			Safe Stall Time (s)		Noise Level Sound Press. dB(A)
	Rotor (lb-ft <sup>2</sup> )	NEMA Load (lb-ft <sup>2</sup> )	Max. Allowable (lb-ft <sup>2</sup> )	Cold	Hot	
G	209.000	3239.00	3239.00	21	15	79

#### VFD Duty Information

Speed Range			VFD		S.F.
Constant Torque	Variable Torque	Constant Power	Carrier	Type	
20-60Hz	3-60Hz	60-90Hz	≤ 5 kHz	VPWM or CPWM	1.0 Only

#### Hazardous Locations Information

CSA Certified
Class I, Div 2, Groups B, C & D Class I, Zone 2, Groups IIB+H2, IIB & IIA
Temp Code (Sinewave / VFD)      T3 / T3

#### Additional Certifications

Other Certification
---------------------

#### Additional Information

Bearings		Approx. Weight
DE	NDE	lbs
6324C3	6320C3	3916

**Nameplate Drawing**

# Advantage Plus IEEE 841

TYPE	AEHH8B	CAT. NO.	APH30065L-841		
OUTPUT	300 HP 224 kW	FRAME	5009B	TEFC	
R.P.M.	1185	POLE	6	INS.	F
VOLTS	575	PHASE	3	Hz	60
AMPS	271.2	CODE	G	S.F.	1.15
AMBIENT	40 °C	NOM. EFF. 95.8		MIN. EFF. 95.0	
BEARINGS	6324C3 / 6320C3			RATING Cont.	
SER. NO.	TBD	DESIGN	B	WT. 3916 LBS	
PWM VFD DUTY	VT	CT	CP	S.F.	
	3-60Hz	20-60Hz	60-90Hz	1.0 Only	

**Connection Diagram**




3 LEAD		SINGLE VOLTAGE			DELTA
VOLTAGE	CONN.	L1	L2	L3	
-	DELTA	1	2	3	

WD\_3D

### Thermal Limit Curves

Motor Type: AEHH8B		Catalogue No: APH30065L-841		Family: Advantage Plus IEEE 841	
HP	300	Safe Stall Time		Full Load A	271.2 A
Voltage	575V 60Hz	Hot	15 s	% Inrush	649 %
RPM	1200	Cold	21 s	Locked Rotor A	1760 A

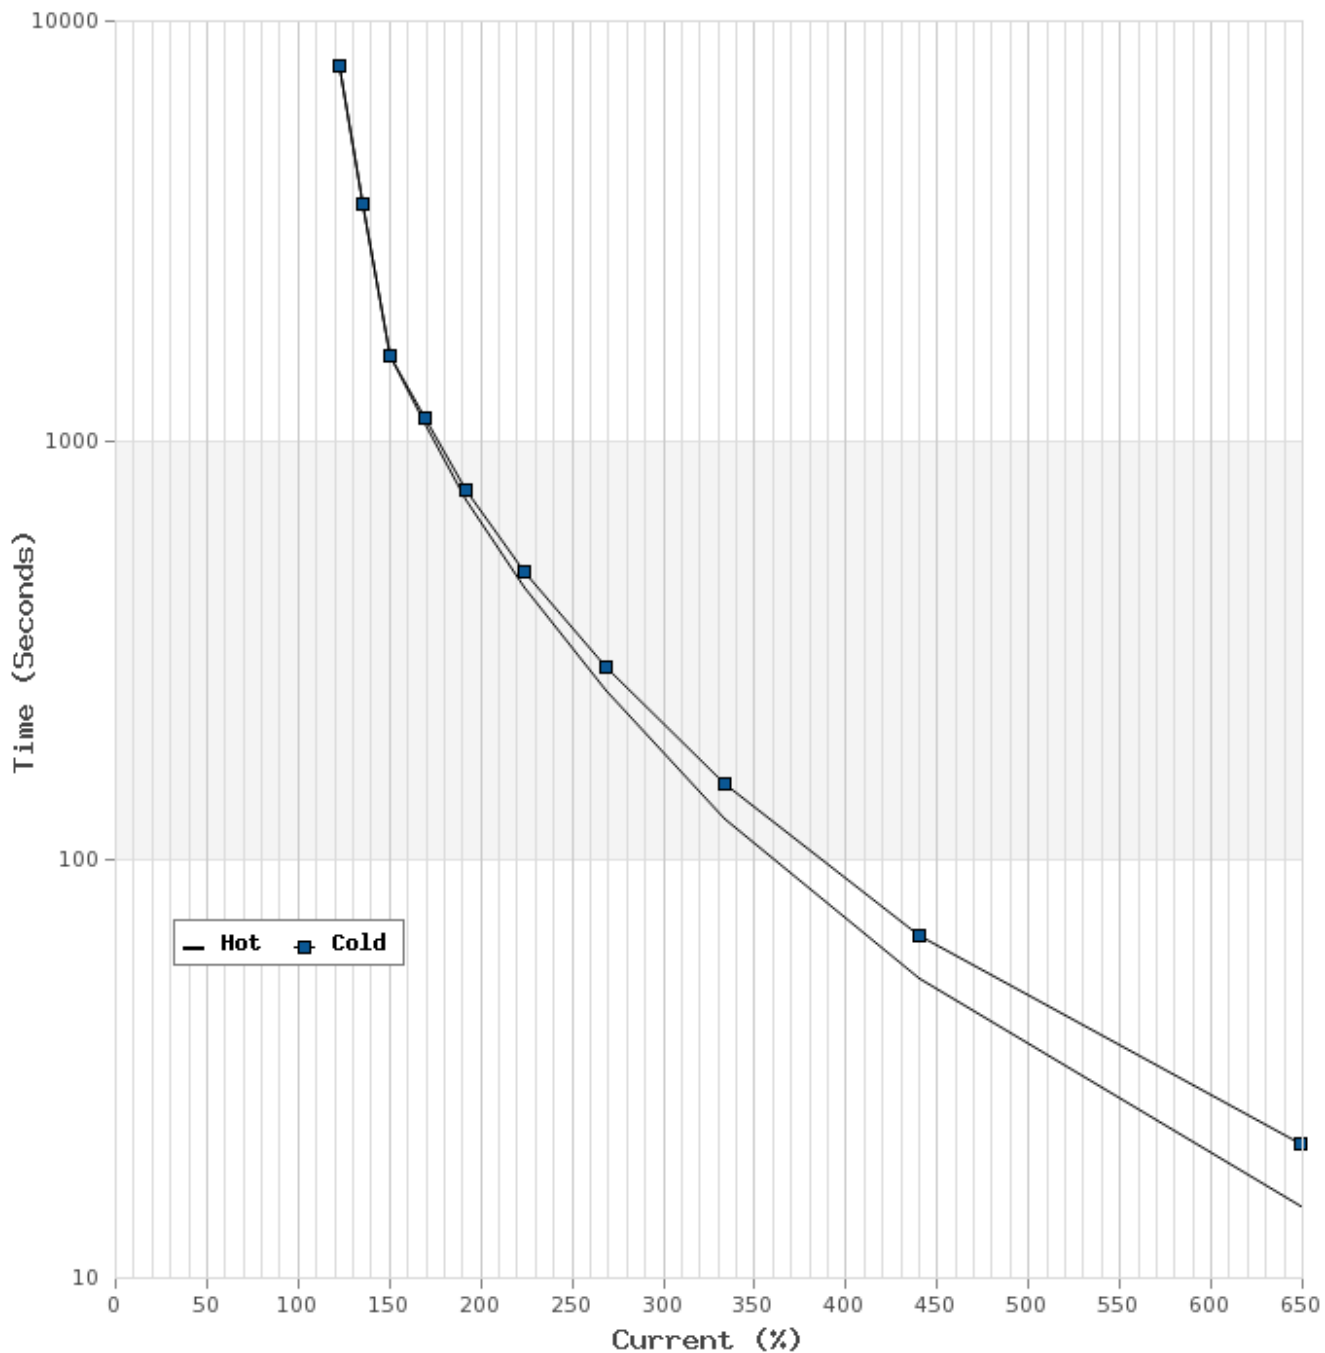

**T-N and I-N Curves**

Motor Type: AEHH8B		Catalogue No: APH30065L-841		Family: Advantage Plus IEEE 841	
HP	300	Full Load T	1328.00 lb-ft	Full Load A	271.2 A
Voltage	575V 60Hz	Locked Rotor T	100 %	Locked Rotor A	1760.0 A
RPM	1200	Pull Up T	100 %	Break Down T	220 %

