

Technical Documentation

XC0016C
Optim TEXP | AEHHXF

Date: May 28, 2018

Technical Data Sheet

Motor Type: AEHHXF

Catalogue No: XC0016C

Nameplate Information

HP	Pole	RPM	Frame	Voltage	Hz	Phase
1	6	1145	145TC	230 / 460	60	3
Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEXP	F	1.15	Continuous	B	-40 to 40°C °C	<3300 ft

Typical Performance

Efficiency (%)				Power Factor (%)		
Full Load		3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
Nom.	Min.					
82.5	80.0	82.0	79.5	66.0	57.0	45.0
Torque				Current (A)		
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	No Load	Full Load	Locked Rotor
5	250	235	305	2.3 / 1.1	3.4 / 1.7	30 / 15
NEMA KVA Code	Inertia (WR ²)			Safe Stall Time (s)		Noise Level Sound Press. dB(A)
	Rotor (lb-ft ²)	NEMA Load (lb-ft ²)	Max. Allowable (lb-ft ²)	Cold	Hot	
N	0.122	15	79	60	42	50

VFD Duty Information

Speed Range			VFD		S.F.
Constant Torque	Variable Torque	Constant Power	Carrier	Type	
12-60Hz	3-60Hz	60-90Hz	≤ 5 kHz	VPWM or CPWM	1.0 Only

Additional Information

Bearings		Approx. Weight
DE	NDE	lbs
6205ZZ	6205ZZ	70

Hazardous Locations Information

CSA/UL Certified	
Class I, Div 1, Groups C & D; Class II, Div 1, Groups E, F & G Class I, Zone 1, Groups IIB & IIA; Class II, Div 1, Groups E, F & G	
Temp Code (Sinewave / VFD)	T3B / T3B

Nameplate Drawing

Optim TEXP

TYPE	AEHHXF	CAT. NO.	XC0016C		
OUTPUT	1 HP 0.75 kW	FRAME	145TC	TEXP	
R.P.M.	1145	POLE	6	INS.	F
VOLTS	230 / 460	PHASE	3	Hz	60
AMPS	3.4 / 1.7	CODE	N	S.F.	1.15
AMBIENT	40 °C	NOM. EFF. 82.5		MIN. EFF. 80.0	
BEARINGS	6205ZZ / 6205ZZ			RATING Cont.	
SER. NO.	TBD	DESIGN	B	WT. 70 LBS	
PWM VFD DUTY	VT	CT	CP	S.F.	
	3-60Hz	12-60Hz	60-90Hz	1.0 Only	

Connection Diagram




9 LEAD DUAL VOLTAGE WYE					
VOLTAGE	CONN.	L1	L2	L3	JOIN
HIGH	WYE	1	2	3	4&7,5&8,6&9
LOW	2 WYE	1,7	2,8	3,9	4&5&6

WD_9Y

Thermal Limit Curves

Motor Type: AEHHXF		Catalogue No: XC0016C		Family: Optim TEXP	
HP	1	Safe Stall Time		Full Load A	3.4 / 1.7 A
Voltage	230 / 460V 60Hz	Hot	42 s	Locked Rotor A	872 / 872 %
RPM	1200	Cold	60 s	Locked Rotor A	30.0 / 15 A

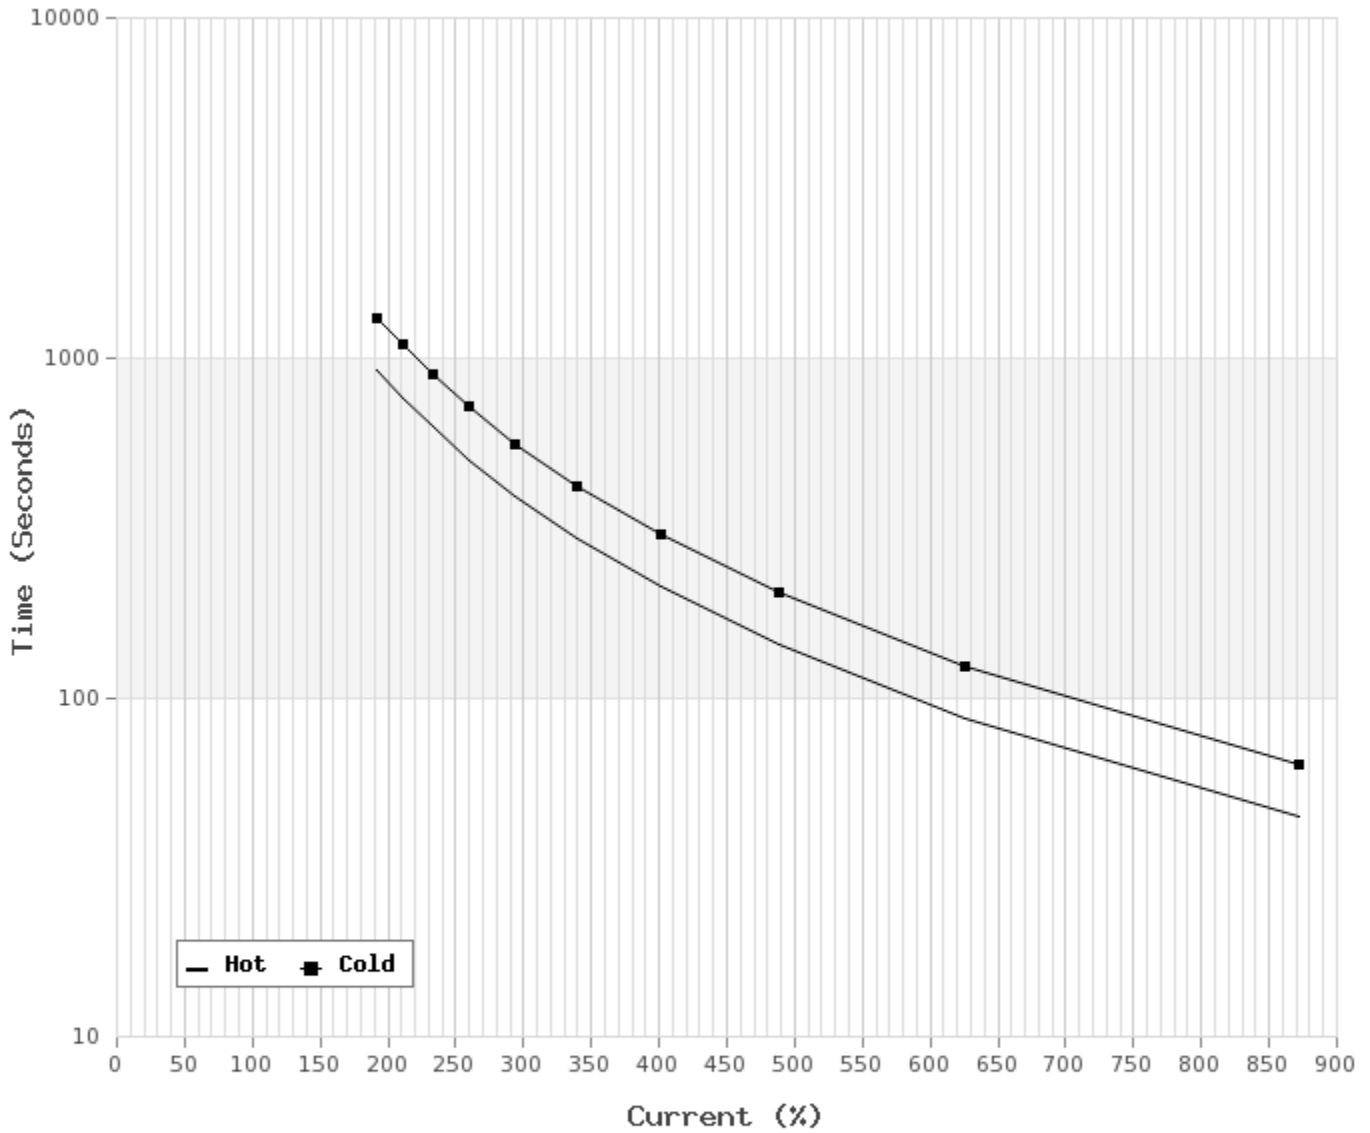

T-N and I-N Curves

Motor Type: AEHHXF		Catalogue No: XC0016C		Family: Optim TEXP	
HP	1	Full Load T	5 lb-ft	Full Load A	3.4 / 1.7 A
Voltage	230 / 460V 60Hz	Locked Rotor T	250 %	Locked Rotor A	30.0 / 15.0 A
RPM	1200	Pull Up T	235 %	Break Down T	305 %

