

Technical Documentation


RD01545

Rolled Steel ODP | ASGH

Date: December 1, 2016

Dimensional Drawing

Catalogue	Model	HP	Pole	kW	Rating	Voltage	Hz	RPM
RD01545	ASGH	15	4	11	Continuous	575 V	60	1800

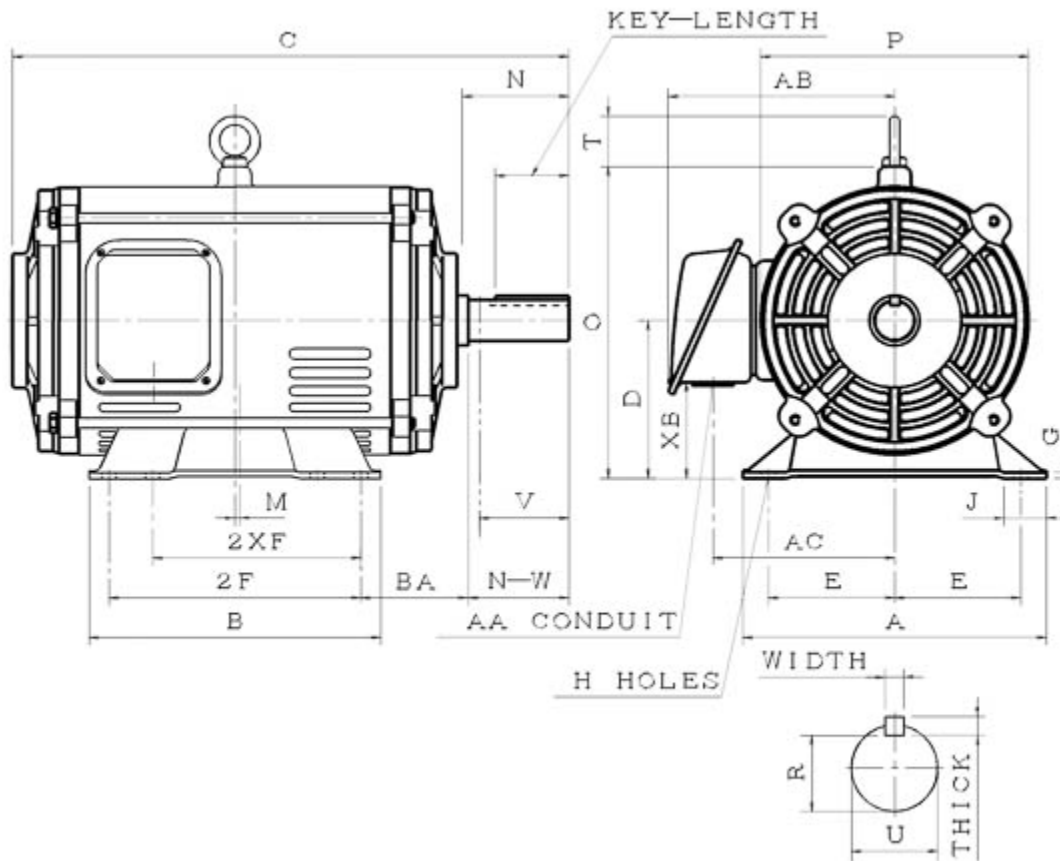

ASGH-SMP-5

Frame Size		Mounting					A	B	C	CD	D
		E	2F	2F2	H	BA					
254T		10		8.25	0.53	4.25	12.05	11.57	22.48		6.25
G	J	K	L	M	O	P	T	Key			Keyseat
								Width	Thick	Length	R
0.24	1.65			0.197	12.55	10.79	2	0.375	0.375	2.91	1.416
Terminal Housing				Aux Box		C/D Flange					
AA	AB	AC	XB	AE	AX	BB	AH	AK	BD	AJ	BF
1.38	8.99	7.2	3.81								
Shaft Extension			Bearings		Approx. Weight Lbs	SPL dBA/3ft	Ins. Class	S.F.	Drive Method	Dimensions	
N-W	U	V	DE	NDE							
4	1.625	3.9	6309ZZC3	6208ZZC3	213	60	F	1.15	Direct Coupling / Belt Drive	Inches	

Technical Data Sheet

Motor Type: ASGH

Catalogue No: RD01545

Nameplate Information

HP	Pole	RPM	Frame	Voltage	Hz	Phase
15	4	1770	254T	575	60	3
Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
ODP	F	1.15	Continuous	B	-40 to 40 °C	<3300 ft

Typical Performance

Efficiency (%)				Power Factor (%)		
Full Load		3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
Nom.	Min.					
93.0	91.7	93.0	93.0	83.0	79.5	70.0
Torque				Current (A)		
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	No Load	Full Load	Locked Rotor
44.50	160	120	240	5.2	14.6	12
NEMA KVA Code	Inertia (WR ²)			Safe Stall Time (s)		Noise Level Sound Press. dB(A)
	Rotor (lb-ft ²)	NEMA Load (lb-ft ²)	Max. Allowable (lb-ft ²)	Cold	Hot	
G	1.862	75	152	17	12	60

VFD Duty Information

Speed Range			VFD		S.F.
Constant Torque	Variable Torque	Constant Power	Carrier	Type	
6-60Hz	3-60Hz	60-120Hz	≤ 5 kHz	VPWM or CPWM	1.0 Only


Additional Information

Bearings		Approx. Weight
DE	NDE	lbs
6309ZZC3	6208ZZC3	213

Hazardous Locations Information

N/A	
0	
0	
Temp Code (Sinewave / VFD)	0 / 0

Connection Diagram

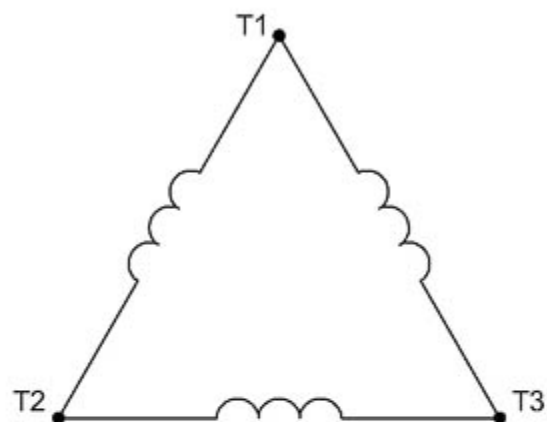


3 LEAD SINGLE VOLTAGE DELTA					
VOLTAGE	CONN.	L1	L2	L3	
-	DELTA	1	2	3	

WD_3D

Thermal Limit Curves

Motor Type: ASGH		Catalogue No: RD01545		Family: Rolled Steel ODP	
HP	15	Safe Stall Time		Full Load A	0.0 / 14.6 A
Voltage	0 / 575V 60Hz	Hot	12 s	Locked Rotor A	82 %
RPM	1800	Cold	17 s	Locked Rotor A	0.0 / 12 A

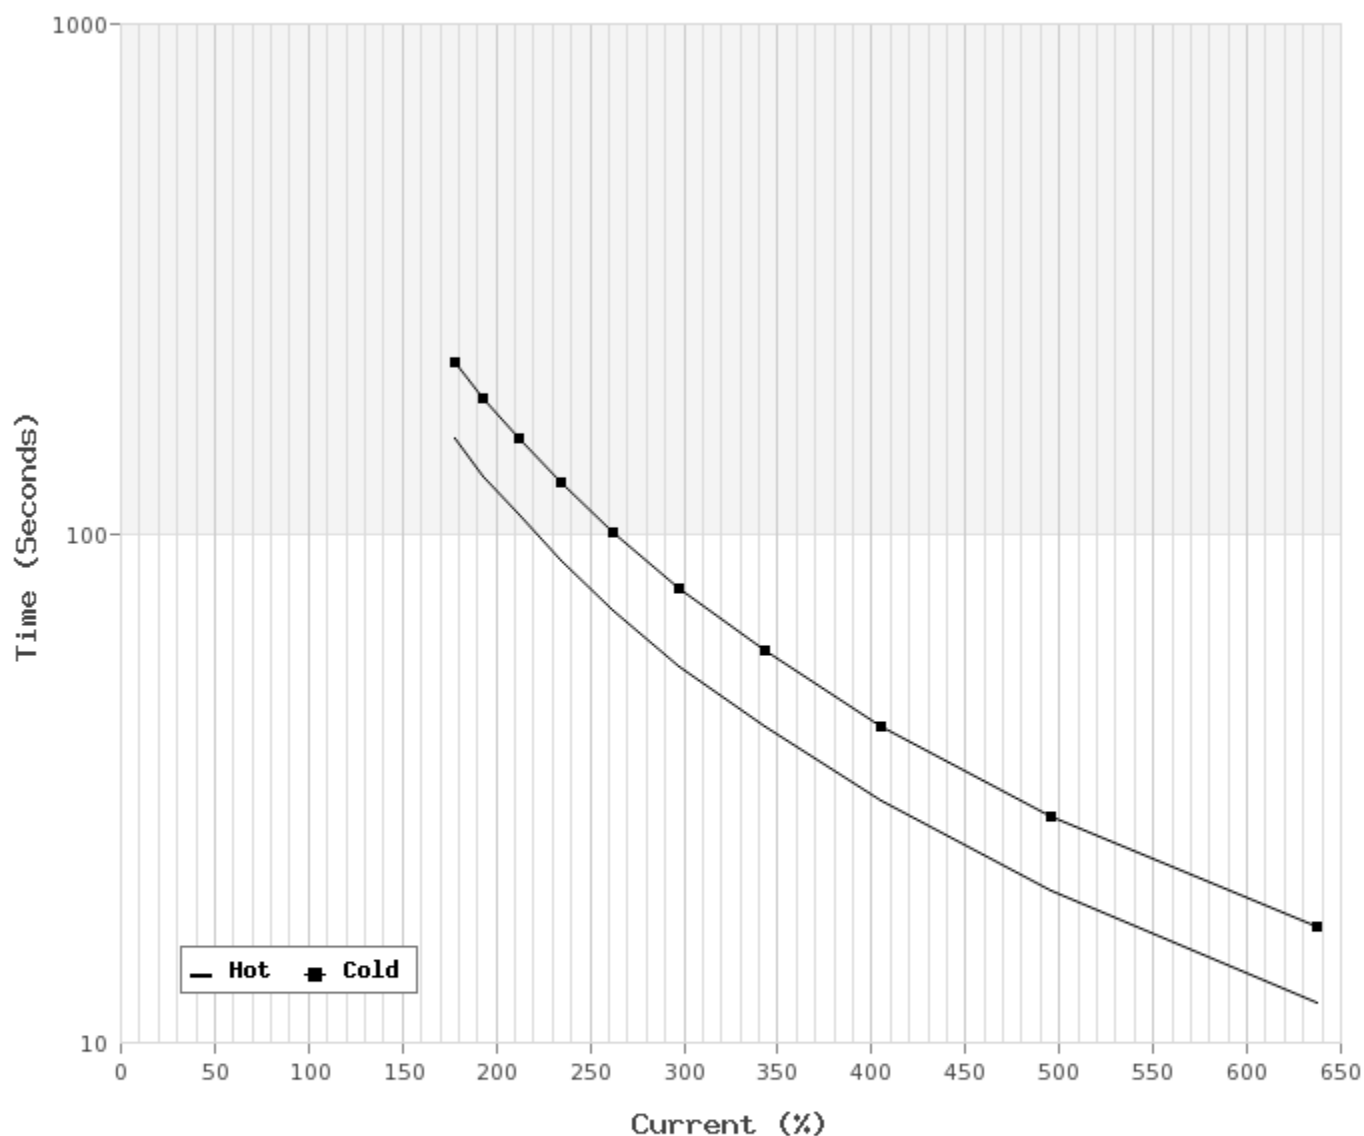

T-N and I-N Curves

Motor Type: ASGH		Catalogue No: RD01545		Family: Rolled Steel ODP	
HP	15	Full Load T	44.50 lb-ft	Full Load A	14.6 A
Voltage	575V 60Hz	Locked Rotor T	160 %	Locked Rotor A	12.0 A
RPM	1800	Pull Up T	120 %	Break Down T	240 %

