


Technical Documentation

PDX35045
Optim TEFC | AEHH8N

Date: July 2, 2021

Dimensional Drawing

Catalogue	Type	HP	RPM	Voltage	Hz	Frame Size
PDX35045	AEHH8N	350	1800	575	60	449T(X)

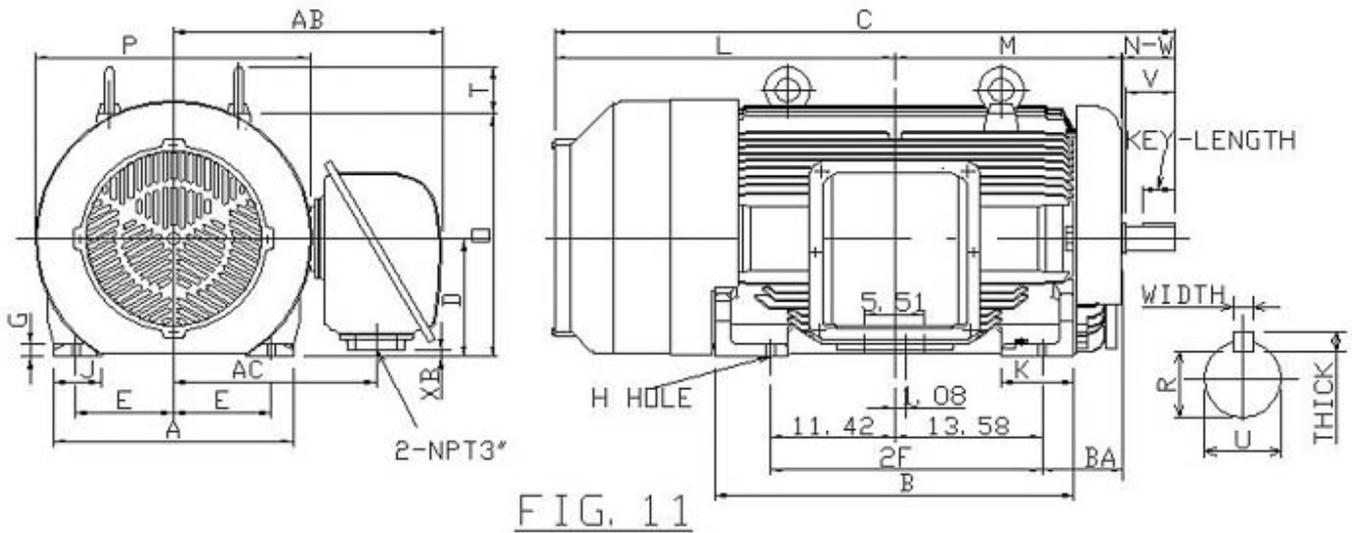

Mounting				A	B	C	D	G	J	K	KL
E	2F	H	BA								
9	25	0.81	7.5	22.05	33.07	60.92	11	1.18	4.35	6.7	

L	M	O	P	T
31.34	20.87	22.6	25.7	4.33

Terminal Housing			
AA	AB	AC	XB
2-3	24.8	18.7	0.65

Shaft Extension			Key			Keyseat
N-W	U	V	Width	Thick	Length	R
8.5	3.375	8	0.875	0.875	6.93	2.88

Bearings		Weight Lbs	Drive Method	Dimensions
DE	NDE			
6320	6316	3186	Direct Coupling / Belt Drive	Inches

Technical Data Sheet

Motor Type: AEHH8N

Catalogue No: PDX35045

Nameplate Information

HP	Pole	RPM	Frame	Voltage	Hz	Phase
350	4	1785	449T(X)	575	60	3
Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.15	Continuous	0	-40 to 40 °C	<1000 m

Typical Performance

Efficiency (%)				Power Factor (%)		
Full Load		3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
Nom.	Min.					
96.20	0.00	96.20	95.70	89.00	86.50	80.00
Torque				Current (A)		
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	No Load	Full Load	Locked Rotor
1027.71	150	130	350	0.0	306.2	1960.00
NEMA KVA Code	Inertia (WR ²)			Safe Stall Time (s)		Noise Level Sound Press. dB(A)
	Rotor (lb-ft ²)	NEMA Load (lb-ft ²)	Max. Allowable (lb-ft ²)	Cold	Hot	
0	124.000	0.00	0.00	0	0	0.0

VFD Duty Information

Speed Range			VFD		S.F.
Constant Torque	Variable Torque	Constant Power	Carrier	Type	
20-60Hz	3-60Hz	60-60Hz	0	VPWM or CPWM	1.0 Only

Hazardous Locations Information

CSA Certified
Class I, Div 2, Groups B, C & D Class I, Zone 2, Groups IIB+H2, IIB & IIA
Temp Code (Sinewave / VFD) T3 / T2C

Additional Certifications

Other Certification
Class II, Div 2, Groups F & G

Additional Information

Bearings		Approx. Weight
DE	NDE	lbs
6320	6316	3186

Nameplate Drawing

Optim TEFC

TYPE	AEHH8N	CAT. NO.	PDX35045		
OUTPUT	350 HP 261.10 kW	FRAME	449T(X)	TEFC	
R.P.M.	1785	POLE	4	INS.	F
VOLTS	575	PHASE	3	Hz	60
AMPS	306.2	CODE	0	S.F.	1.15
AMBIENT	40 °C	NOM. EFF. 96.20		MIN. EFF. 0.00	
BEARINGS	6320 / 6316			RATING Cont.	
SER. NO.	TBD	DESIGN	0	WT. 3186 LBS	
PWM VFD DUTY	VT	CT	CP	S.F.	
	3-60Hz	20-60Hz	60-60Hz	1.0 Only	

Connection Diagram




3 LEAD		SINGLE VOLTAGE			DELTA
VOLTAGE	CONN.	L1	L2	L3	
-	DELTA	1	2	3	

WD_3D

Thermal Limit Curves

Motor Type: AEHH8N		Catalogue No: PDX35045		Family: Optim TEFC	
HP	350	Safe Stall Time		Full Load A	306.2 A
Voltage	575V 60Hz	Hot	0 s	% Inrush	640 %
RPM	1800	Cold	0 s	Locked Rotor A	1960.00 A

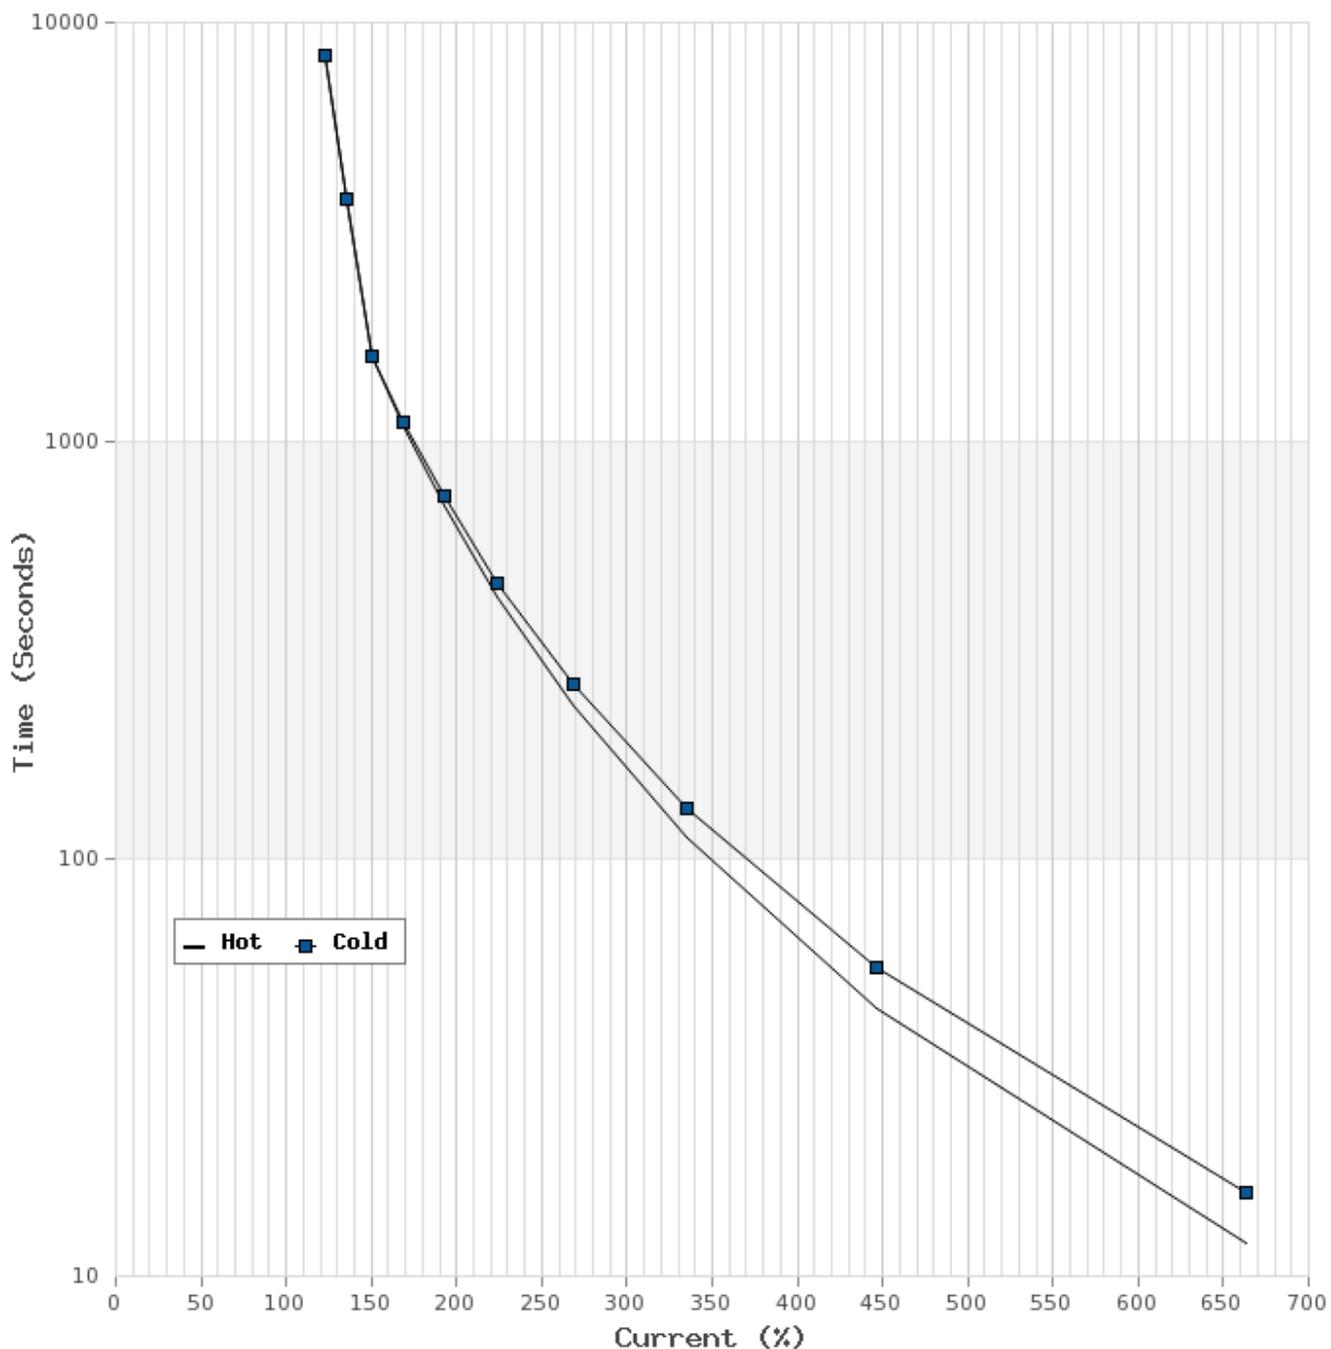

T-N and I-N Curves

Motor Type: AEHH8N		Catalogue No: PDX35045		Family: Optim TEFC	
HP	350	Full Load T	1027.71 lb-ft	Full Load A	306.2 A
Voltage	575V 60Hz	Locked Rotor T	150 %	Locked Rotor A	1960.0 A
RPM	1800	Pull Up T	130 %	Break Down T	350 %

