


Technical Documentation

XH1006R
Optim TEXP | AEHHXU

Date: December 1, 2016

Dimensional Drawing

Catalogue	Model	HP	Pole	kW	Rating	Voltage	Hz	RPM
XH1006R	AEHHXU	100	6	75	Continuous	230 / 460 V	60	1200

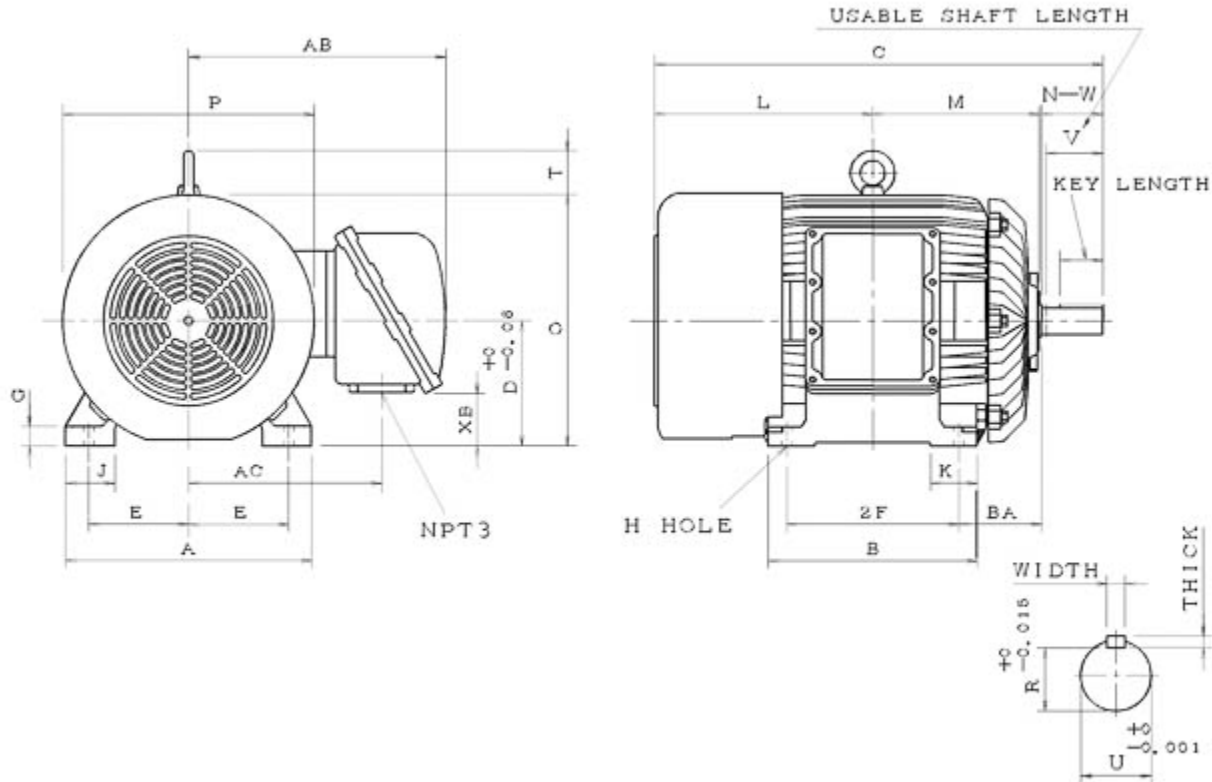

AEHHXU-HMP-2 1 0

Frame Size	Mounting					A	B	C	CD	D	
	E	2F	2F2	H	BA						
444T	9	14.5		0.81	7.5	22.05	17.5	42.05		11	
G	J	K	L	M	O	P	T	Key			Keyseat
1.55	4.35	4.35	18.8	14.45	22.25	23.3	3.55	Width	Thick	Length	R
								0.875	0.875	6.91	2.880
Terminal Housing				Aux Box		C/D Flange					
AA	AB	AC	XB	AE	AX	BB	AH	AK	BD	AJ	BF
NPT3"	21.65	16.6	5.1								
Shaft Extension			Bearings		Approx. Weight Lbs	SPL dBA/3ft	Ins. Class	S.F.	Drive Method	Dimensions	
N-W	U	V	DE	NDE							
8.5	3.375	8	NU318	6318	1650	80	F	1.15	Belt Drive	Inches	

Technical Data Sheet

Motor Type: AEHHXU

Catalogue No: XH1006R

Nameplate Information

HP	Pole	RPM	Frame	Voltage	Hz	Phase
100	6	1180	444T	230 / 460	60	3
Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEXP	F	1.15	Continuous	B	-40 to 40 °C	<3300 ft

Typical Performance

Efficiency (%)				Power Factor (%)		
Full Load		3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
Nom.	Min.					
95.0	94.1	94.5	93.6	83.0	81.0	74.0
Torque				Current (A)		
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	No Load	Full Load	Locked Rotor
444.9263486	130	104	210	96.0 / 48.0	237.0 / 119.0	1450 / 725
NEMA KVA Code	Inertia (WR ²)			Safe Stall Time (s)		Noise Level Sound Press. dB(A)
	Rotor (lb-ft ²)	NEMA Load (lb-ft ²)	Max. Allowable (lb-ft ²)	Cold	Hot	
G	50.000	1181	2812	37	15	80

VFD Duty Information

Speed Range			VFD		S.F.
Constant Torque	Variable Torque	Constant Power	Carrier	Type	
6-60Hz	3-60Hz	60-90Hz	≤ 5 kHz	VPWM or CPWM	1.0 Only


Additional Information

Bearings		Approx. Weight
DE	NDE	lbs
NU318	6318	1650

Hazardous Locations Information

CSA/UL Certified	
Class I, Div 1, Groups D; Class II, Div 1, Groups E, F & G Class I, Zone 1, Groups IIA; Class II, Div 1, Groups E, F & G	
Temp Code (Sinewave / VFD)	T3B / T3B

Connection Diagram

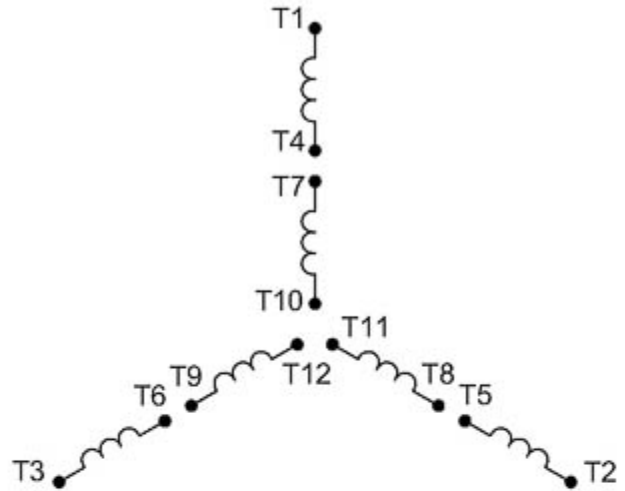


12 LEAD DUAL VOLTAGE WYE/DELTA						
VOLTAGE	CONNECTION		L1	L2	L3	JOIN
HIGH	START	WYE	1	2	3	4&7,5&8,6&9 10&11&12
	RUN	DELTA	1,12	2,10	3,11	4&7,5&8,6&9
LOW	START	2 WYE	1,7	2,8	3,9	4&5&6 10&11&12
	RUN	2 DELTA	1,6,7 12	2,4,8 10	3,5,9 11	

WD_12YD

Thermal Limit Curves

Motor Type: AEHHXU		Catalogue No: XH1006R		Family: Optim TEXP	
HP	100	Safe Stall Time		Full Load A	237.0 / 119.0 A
Voltage	230 / 460V 60Hz	Hot	15 s	Locked Rotor A	612 / 609 %
RPM	1200	Cold	37 s	Locked Rotor A	1,450.0 / 725 A

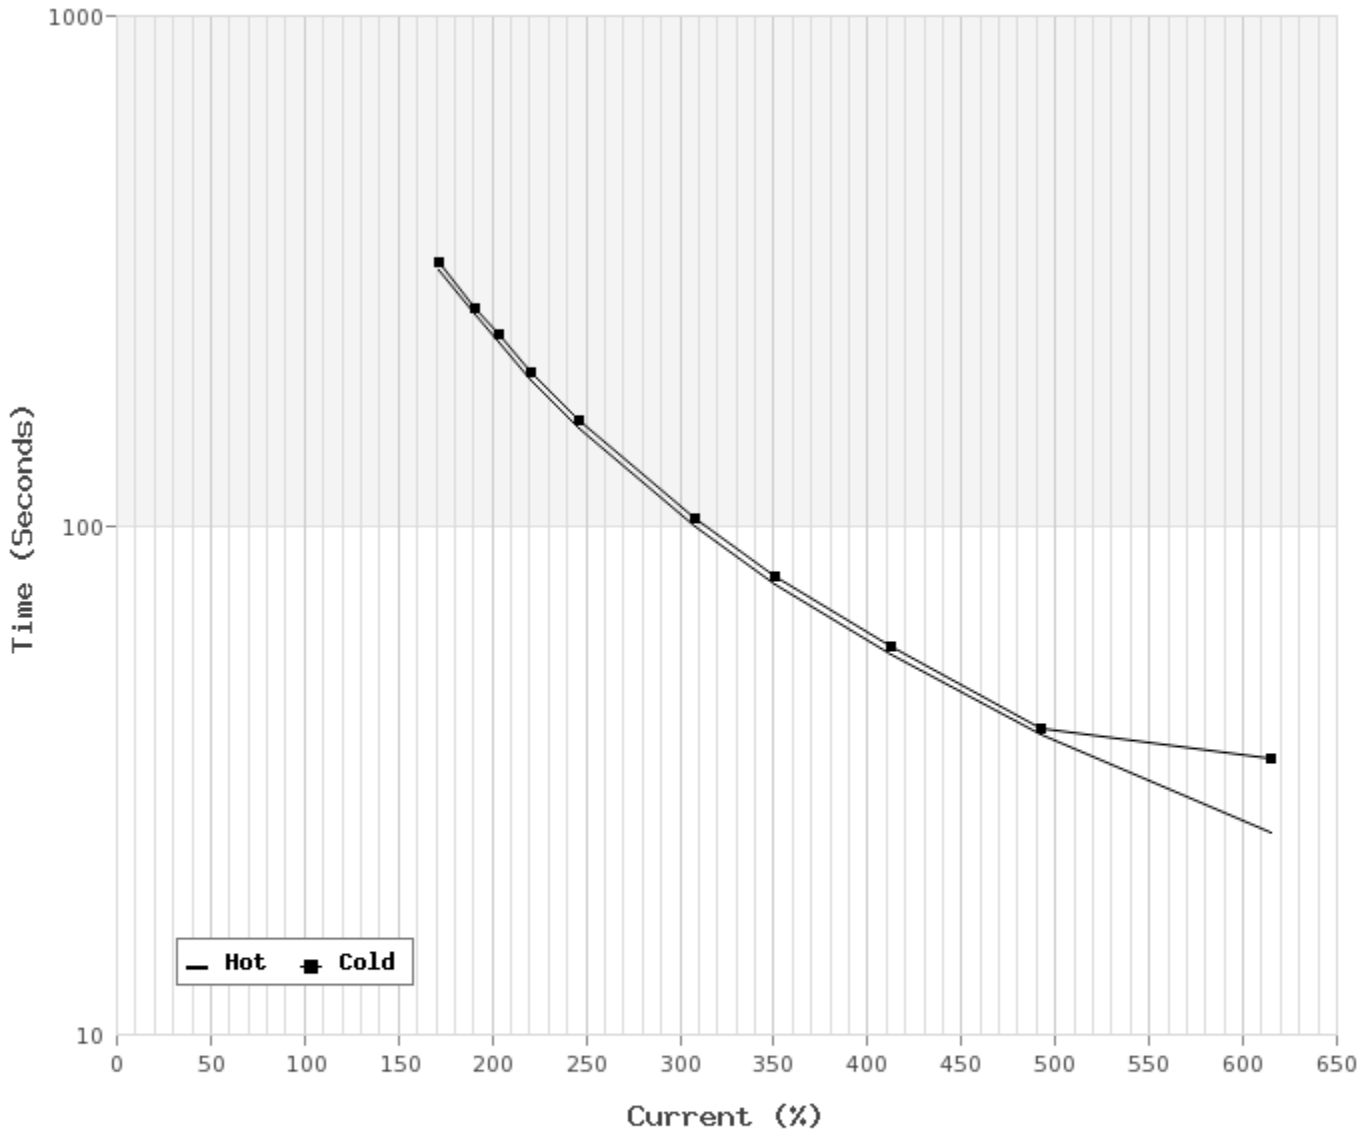

T-N and I-N Curves

Motor Type: AEHHXU		Catalogue No: XH1006R		Family: Optim TEXP	
HP	100	Full Load T	444.9263486 lb-ft	Full Load A	237.0 / 119.0 A
Voltage	230 / 460V 60Hz	Locked Rotor T	130 %	Locked Rotor A	1,450.0 / 725.0 A
RPM	1200	Pull Up T	104 %	Break Down T	210 %

